



01/19/00

S&H Form: PTO/SB/05 (12/97)

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Attorney Docket No. 1359.1023
	First Named Inventor or Application Identifier: Shoji HAYAKAWA et al.
	Express Mail Label No.

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form 2. <input checked="" type="checkbox"/> Specification, Claims & Abstract [Total Pages: <u>23</u>] 3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets: <u>12</u>] 4. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages: <u>3</u>] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). 5. <input type="checkbox"/> Incorporation by Reference (usable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein. 6. <input type="checkbox"/> Microfiche Computer Program (Appendix) 7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies	
ACCOMPANYING APPLICATION PARTS	
8. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney 10. <input type="checkbox"/> English Translation Document (if applicable) 11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 14. <input type="checkbox"/> Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired. 15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 16. <input type="checkbox"/> Other:	
17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information: [] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: ____ / ____	
18. CORRESPONDENCE ADDRESS	
STAAS & HALSEY LLP Attn: H. J. Staas 700 Eleventh Street, N.W., Suite 500 Washington, DC 20001 Telephone: (202) 434-1500 Facsimile: (202) 434-1501	

jc675 U.S. PTO
09/487467
01/19/00

SPEAKER VERIFICATION APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a speaker verification apparatus and method for determining by the voice of the speaker whether or not the speaker is an authorized user based on the feature parameters of the voices that are previously registered.

10 2. Description of the Prior Art

 In recent years, with the development of computer technologies, a communication environment has been developed rapidly. With the development of such a communication environment, computer telephony integration through the telephone has become common in ordinary
15 homes.

 In the field of such computer telephony integration through the telephone, a problem may arise when accessing information that should not be known to people other than the authorized person or a specific group of authorized people, such as private information or information
20 subjected to secrecy obligation. More specifically, for example, when a push-button telephone is used, it is possible to acquire an access authority to information by inputting a password by an operation of pushing buttons of the telephone. However, when the password is known to unauthorized people, they can access the information easily
25 although they are not duly authorized. For this reason, there is a need of verifying whether or not the person who tries to access the information is the duly authorized person or one of a specific group of authorized people using the voice, which is inherent to the individual. In order to ensure such a security function, it is important that the registration of
30 voices for verification or the determination of the threshold for judging whether or not the input voice is the voice of an authorized person does not cause an excessive burden to the user.

Conventionally in general, a fixed and predetermined value has been used as a threshold for determining whether or not the speaker is an authorized person. More specifically, as shown in Fig. 1, a verification distance between an input voice and a previously registered voice is calculated and compared to a predetermined threshold. When the verification distance is equal to or shorter than the predetermined threshold ("—" in Fig. 1), it is determined that the speaker is an authorized person. When the verification distance is longer than the predetermined threshold ("+" in Fig. 1), it is determined that the speaker is an unauthorized person.

It is desirable that such a threshold is set to a value as described below. In Fig. 2, FR (false rejection error rate), which is a probability of the case where the determination that the speaker should be rejected as an unauthorized person is erroneous, is plotted in the vertical axis against the threshold of the verification distance in the horizontal axis. Similarly, FA (false acceptance error rate), which is a probability of the case where an unauthorized person is erroneously accepted, is plotted in the vertical axis against the threshold of the verification distance in the horizontal axis. When the threshold is a small value, the rate FA of erroneous acceptance of an unauthorized person is low, whereas the rate FR of erroneous rejection of an authorized person is high. On the other hand, when the threshold is a large value, the rate FR of erroneous rejection of an authorized person is low, whereas the rate FA of erroneous acceptance of an unauthorized person is high. Therefore, it is desirable to set the threshold to be an appropriate value depending on the level of importance of the two error rates. It is general to perform verification using a value that allows the two error rates to be eventually equal experimentally as the threshold.

However, in the above-described method, it is necessary to be aware of the tendency of the false rejection error rate FR and the false acceptance error rate FA beforehand to set the threshold. However, it is difficult to know the two error rates before being used. Therefore, a

preliminary experiment is performed to seek an approximate value, or the threshold is updated whenever it is required at the time of using the system. The method of performing a preliminary experiment is disadvantageous for the following reasons. Because of the difference in the conditions between when the preliminary experiment is performed and when the system is actually used, it is often necessary to perform a test again when using the system. In addition, in order to obtain the false rejection error rate FR, it is necessary for an authorized person (user) to give his/her voice many times, which causes a large burden to the user and is impractical. On the other hand, the method of updating the threshold whenever it is required at the time of using the system is disadvantageous because updating the threshold causes a large burden to the user as well.

Furthermore, the voice of an authorized person can change over time, and in general, accurate identification of the speaker is difficult when noise such as background sound is mixed therewith.

SUMMARY OF THE INVENTION

Therefore, with the foregoing in mind, it is an object of the present invention to provide a speaker verification apparatus and method whose implementation environment can be set without an excessive burden to a user and that can specify the speaker in a high accuracy.

A speaker verification apparatus of the present invention includes an identity claim input part to which an identity claim is input; a speaker selecting part for selecting the voice information of the registered speaker corresponding to the identity claim input to the identity claim input part; a speaker storing part for storing voice information of speakers; a voice input part to which a voice of a speaker is input; a voice analyzing part for analyzing the voice input to the voice input part; a speaker distance calculating part for calculating a verification distance between a feature parameter of the input voice and that of the voice of the registered speaker and the speaker distances between a feature parameter of the

input voice and those of the voices of speakers other than the registered speaker that are stored in the speaker sorting part, based on the analysis results of the voice analyzing part and the voice information stored in the speaker storing part; and a speaker judging part for determining whether or not the input voice matches the registered speaker corresponding to the input identity claim. The speaker verification apparatus further includes a false acceptance error rate input part to which a false acceptance error rate is input as a threshold, the false acceptance error rate being predetermined by a system manager or a user or adjustable depending on the performance, and a distribution estimating part for obtaining a probability distribution of interspeaker distances based on the speaker distances calculated in the speaker distance calculating part. The speaker judging part determines that the input voice is the voice of the person specified by the identity claim, in the case where the verification distance calculated in the speaker distance calculating part is included in a region defined by the input false acceptance error rate in the probability distribution of the interspeaker distances. Herein, "interspeaker distances" means a distance with a speaker template that is not the template of the person specified by the identity claim.

In this embodiment, a fixed threshold of a verification distance is not used, but a probability of the interspeaker distances is calculated each time a system is used, and a threshold is determined based on the false acceptance error rate in the distribution of the interspeaker distances. Therefore, a criterion for judging the speaker closer to the theoretical values of a statistical probability distribution can be obtained. In addition, the false acceptance error rate can be maintained closer to the theoretical values even if the voice input environment changes and a noise is mixed. Thus, the verification accuracy of the speaker verification can be maintained high without being affected by the aging of the input voice. The present invention is based on the empirical fact that although the speaker distance itself constantly changes by external factors such as the difference in the environment where a voice is input

and the aging of the voice, the relationship with respect to the interspeaker distances between the input voice and the other registered speakers hardly changes.

Another aspect of the present invention is software that executes
5 the functions of the above-described speaker verification apparatus.
More specifically, the present invention is directed to a computer-readable recording medium on which the method for verifying a speaker or steps of the method are recorded as a program. The method includes inputting
10 an identity claim; selecting voice information of a registered speaker
corresponding to the input identity claim; inputting a voice of the speaker; analyzing the input voice; calculating a verification distance between the input voice and the voice of the registered speaker and the
15 speaker distances between the input voice and voices of registered speakers other than the registered speaker, based on the analysis results
and the voice; and determining whether or not the input voice matches the registered speaker corresponding to the input identity claim. The
method further includes inputting a false acceptance error rate as a threshold, the false acceptance error rate being predetermined by a
20 system manager or a user or adjustable depending on the performance;
and obtaining a probability distribution of the interspeaker distances based on the calculated speaker distances. It is determined that the input voice is the voice of the person specified by the identity claim, in the case where the calculated verification distance is included in a region
25 defined by the input false acceptance error rate in the probability distribution of the interspeaker distances.

This embodiment can realize a speaker verification apparatus as described below by loading the program onto a computer and executing the program. A fixed threshold of a verification distance is not used, but a probability distribution of the interspeaker distances is calculated each
30 time a system is used, and a threshold is determined based on the false acceptance error rate in the distribution. Therefore, a criterion for judging the speaker closer to the theoretical values of a statistical

probability distribution can be obtained. In addition, the false acceptance error rate can be maintained closer to the theoretical values even if the voice input environment changes and a noise is mixed. Thus, the verification accuracy of the speaker verification can be maintained high without being affected by the aging of the input voice.

These and other advantages of the present invention will become apparent to those skilled in the art upon reading and understanding the following detailed description with reference to the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a general conceptual diagram of speaker verification.

Fig. 2 is a diagram for illustrating a method for specifying a threshold in a conventional speaker verification method.

Fig. 3 is a structural block diagram of a speaker verification apparatus of an embodiment of the present invention.

Fig. 4 is a diagram for illustrating a method for specifying a threshold in the speaker verification apparatus of an embodiment of the present invention.

Fig. 5 is a structural block diagram of a speaker verification apparatus of one example of the present invention when verifying the speaker.

Fig. 6 is a graph showing the experimental results obtained when a speaker verification method of one example of the present invention is used under a quiet environment.

Fig. 7 is a graph showing the experimental results obtained when a speaker verification method of one example of the present invention is used under a noisy environment.

Fig. 8 is a graph showing the experimental results obtained when a speaker verification method of one example of the present invention is used for each utterance period.

Fig. 9 is a structural block diagram of a speaker verification apparatus of one example of the present invention when registering a

speaker.

Fig. 10 is a flowchart of the processes for verifying the speaker in the speaker verification apparatus of an embodiment of the present invention.

5 Fig. 11 is a flowchart of the processes for registering a speaker in the speaker verification apparatus of an embodiment of the present invention.

Fig. 12 is a diagram of an illustrative recording medium.

10 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, a speaker verification apparatus of an embodiment of the present invention will be described with reference to the accompanying drawings. Fig. 3 is a structural diagram showing the principle of the speaker verification apparatus of an embodiment of the present invention. Referring to Fig. 3, numeral 31 denotes an identity claim input part. Numeral 32 denotes a speaker template selecting part. Numeral 33 denotes a speaker template storing part. Numeral 34 denotes a voice input part. Numeral 35 denotes a voice analyzing part. Numeral 36A denotes a verification distance calculating part. Numeral 36B denotes a speaker distance calculating part. Numeral 37 denotes a distribution estimating part. Numeral 38 denotes a false acceptance error rate input part. Numeral 39 denotes a speaker judging part.

In Fig. 3, at the time of using a system, an identity claim is input to the ID input part 31. Then, the speaker template selecting part 32 selects a template corresponding to the identity claim from templates of a plurality of speakers that are previously registered in the speaker template storing part 33 and sends the selected template to the verification distance calculating part 36A. At the same time, the templates of the registered speakers other than the speaker corresponding to the identity claim are sent out to the speaker distance calculating part 36B.

Next, in the voice analyzing part 35, a voice input to the voice

input part 34 is converted into a feature parameter for speaker verification and sent out to the verification distance calculating part 36A and the speaker distance calculating part 36B. The verification distance calculating part 36A calculates the distance d_{id} between the voice
5 template of the speaker corresponding to the identity claim and the feature parameter of the input voice.

On the other hand, the speaker distance calculating part 36B calculates the distances d_1, d_2, \dots and d_N between the voice templates of N other registered speakers and the feature parameter of the input voice
10 and delivers the results to the distribution estimating part 37. The distribution estimating part 37 estimates a probability distribution function $F(d)$ of the speaker distances between the voices of the registered speakers other than the speaker corresponding to the input identity claim and the input voice, using the calculated N distances d_1, d_2, \dots and d_N with
15 respect to the other registered speakers and delivers the result to the speaker judging part 39.

The estimation of the probability distribution function $F(d)$ leads to a probability density function $f(d)$. The area of the function shown in the probability density function $f(d)$ indicates a probability value. The
20 relationship between the probability distribution function $F(d)$ and the probability density function $f(d)$ is that as shown in Equation 1.
Equation 1

$$F(x) = \int_{-\infty}^x f(t) dt$$

25 Therefore, the speaker judging part 39 judges the speaker based on the probability density function $f(d)$ in the following manner. When the speaker distance d_{id} with respect to the speaker corresponding to the identity claim is within the region defined by the level of significance p of
30 regarding an unauthorized person as the person specified by the ID, which is previously designated in the false acceptance error rate input

part 38, it is determined that the speaker is the person specified by the ID. When the distance d_{id} is not within the region, it is determined that the speaker is not the person specified by the ID. In the determination based on the probability distribution function $F(d)$, when $F(d_{id}) < p$ is satisfied, the speaker is the person specified by the ID. When $F(d_{id}) \geq p$ is satisfied, the speaker is not the person specified by the ID.

Fig. 4 shows a diagram illustrating the method for judging the speaker by the speaker judging part 39. In the case where the probability density function $f(d)$ is already obtained, the hatched region in the Fig. 4 corresponds to the region defined by the level of significance p of regarding an unauthorized person as the person specified by the ID. More specifically, the level of significance p of regarding an unauthorized person as the person specified by the ID is specified to determine that the speaker is the person specified by the ID when the distance d_{id} is in the range in which the level of significance of regarding an unauthorized person as the person specified by the ID is smaller than the designated level of significance p .

Next, Fig. 5 is a block diagram of a speaker verification apparatus of one example of the present invention when verifying the speaker. Referring to Fig. 5, numerals 51A and 51B denote DP matching parts. Numeral 52 denotes a statistic calculating part. Numeral 53 denotes a speaker judging part. Numeral 54 denotes a false acceptance error rate input part.

In Fig. 5, similarly to Fig. 3, an identity claim is input to the ID input part 31 at the time of using a system. Then, the speaker template selecting part 32 selects a template corresponding to the identity claim from templates of a plurality of speakers that are previously registered in the speaker template storing part 33 and sends the selected template to the DP matching part 51A. At the same time, the templates of the registered speakers other than the speaker corresponding to the identity claim are sent out to the DP matching part 51B. Herein, "DP" stands for dynamic programming.

Next, in the voice analyzing part 35, a voice input to the voice input part 34 is converted into a feature parameter for speaker verification and sent out to the DP matching calculating parts 51A and 51B. The DP matching part 51A calculates the distance d_{id} between the voice template of the speaker corresponding to the identity claim and the feature parameter of the input voice.

On the other hand, the DP matching part 51B calculates the distances d_1, d_2, \dots and d_N between the voice templates of N other registered speakers and the feature parameter of the input voice, and delivers the results to the statistic calculating part 52. The statistic calculating part 52 estimates the average μ and the standard deviation σ of the speaker distances, using the calculated N distances d_1, d_2, \dots and d_N with respect to the other registered speakers, and delivers the estimations to the speaker judging part 53. The speaker judging part 53 defines a normal distribution using the average μ and the standard deviation σ of the distances with respect to the other registered speakers.

If the probability distribution is a normal distribution, a probability distribution function $F(d)$ in a point $\alpha \cdot \sigma$ away from the average μ can be determined by α . Therefore, whether or not the speaker is the person specified by the ID can be determined by examining whether or not the verification distance d_{id} is in a region where d_{id} is equal to or smaller than $(\mu - \alpha \cdot \sigma)$ in order to determine whether or not the verification distance d_{id} with respect to the input voice is within the region defined by the previously designated level of significance p of regarding an unauthorized person as the person specified by the ID. More specifically, $(\mu - \alpha \cdot \sigma)$ and d_{id} are compared and the determination is performed as follows. When d_{id} is equal to or smaller than $(\mu - \alpha \cdot \sigma)$, it is determined that the speaker is the person specified by the ID. When d_{id} is larger than $(\mu - \alpha \cdot \sigma)$, it is determined that the speaker is not the person specified by the ID. In the case where it is assumed that the probability distribution is a normal distribution, the false acceptance

error rate input part 54 inputs α corresponding to the level of significance p of regarding an unauthorized person as the person specified by the ID beforehand.

In this embodiment, the feature parameters are registered in the form of templates beforehand, and the probability distribution with respect to other registered speakers is estimated based on the speaker distances obtained by DP matching. The present invention is not limited to this method. For example, the probability distribution can be estimated based on a probability value output from a probability model such as Hidden Markov Model.

Furthermore, in the speaker template storing part 33, speakers may be classified by the gender beforehand. When the speaker corresponding to the identity claim is male, the speaker templates of other male speakers are used for estimation of the probability distribution. When the speaker corresponding to the identity claim is female, the speaker templates of other female speakers are used for estimation of the probability distribution. Thus, the error rate of the probability distribution becomes closer to the error rate obtained from the normal distribution function table. (The identity claim is something which indicates a specific individual such as a name).

Furthermore, in this embodiment, the probability distribution of the speaker distances is estimated as a single normal distribution. However, the probability distribution can be estimated as a mixed normal distribution defined by weighting addition of a plurality of normal distributions or other general probability distributions. (This is not necessarily limited to the distribution of other registered speakers, and other speakers can be prepared for the calculation of the distribution.)

Next, the effects of this embodiment are confirmed by the results of the following experiments. First, Fig. 6 is a graph showing the results of verification of 15 male speakers using the speaker verification method of this embodiment.

In Fig. 6, the horizontal axis indicates α obtained from the

normal distribution function according to the previously designated false error rate. The solid line indicates theoretical values of the false error rate, which can be calculated as $1 - \Phi(\alpha)$ using a normal distribution function $\Phi(\alpha)$ because the distribution of the speaker distances is assumed to be a normal distribution.

Furthermore, FA (false acceptance) indicates a false acceptance error rate, which is a probability of erroneously accepting an unauthorized person. FR (false rejection) indicates a false rejection error rate, which is a probability of erroneously rejecting the person specified by the ID.

In Fig. 6, the solid line shows the theoretical values of the false acceptance error rate. The short broken line shows FR obtained by experiments, and the long broken line shows FA obtained by experiments. As shown in Fig. 6, the solid line substantially matches the long broken line, which means that the experimental results of the false acceptance error rate are not significantly different from the theoretical values. Therefore, the verification accuracy of the speaker verification method of verifying the speaker based on the pre-assigned false acceptance error rate of this embodiment is expected to be high.

Similarly to Fig. 6, Fig. 7 shows the verification results when a white noise with a SNR (signal noise ratio) of about 20dB is added to the voice to be verified. Herein, "a SNR of about 20dB" refers to the level in which noise is mixed in a ratio of one noise to 10 signals. Furthermore, the solid line shows the theoretical values of the false acceptance error rate. FR (noisy) indicates a FR when a white noise is mixed. FR (clean) indicates a FR when there is no white noise. FA (noisy) indicates a FA when a white noise is mixed. FA (clean) indicates a FA when there is no white noise.

The experimental results of Fig. 7 show that with respect to FR, the white noise significantly changes the false rejection error rate, which is the probability of erroneously rejecting the person specified by the ID. On the other hand, with respect to FA, the white noise does not affect the

fact that the solid line for the theoretical values of the false acceptance error rate substantially matches the experimental results regarding FA. Therefore, even if an unexpected noise is input together with the voice because the voice input environment is varied, the verification accuracy of the speaker verification method of verifying the speaker based on the pre-assigned false acceptance error rate of this embodiment is expected to be high.

Furthermore, similarly to Fig. 6, Fig. 8 shows the verification results when the time gap between the input of a voice for verification and the input of voices for registration increases by 3 months. In Fig. 8, the solid line shows the theoretical values of the false acceptance error rate, and the experimental results of FA and FR after 3, 6, 9, and 12 months have passed are shown for each of FR and FA.

The experimental results of Fig. 8 show that with respect to FR, the time gap significantly changes the false rejection error rate, which is the probability of erroneously rejecting the person specified by the ID. On the other hand, with respect to FA, the time gap does not affect the fact that the solid line for the theoretical values of the false acceptance error rate substantially matches the broken lines indicating FA for every 3 months.

Therefore, even if the feature of the voice of the speaker has changed because of the time gap of the input of the voice, there is no significant change in the speaker distances with respect to other registered speakers. Thus, the verification accuracy of the speaker verification method of verifying the speaker based on the pre-assigned false acceptance error rate of this embodiment is maintained high. In addition, there is no need of updating the once-registered speaker templates every time the system is used, which eliminates an excessive burden on the user.

Next, Fig. 9 is a block diagram of a speaker verification apparatus of one example of the present invention when registering speakers. In Fig. 9, numeral 91 denotes a registration individual ID input part.

Numeral 92 denotes a registration voice input part. Numeral 93 denotes a registration voice analyzing part. Numeral 94 denotes a background noise input part. Numeral 95 denotes a noise addition part. Numeral 96 denotes a voice database regarding other registered speakers.

5 In Fig. 9, the individual ID of a speaker to be registered is input from the registration ID input part 91, and the voice of the speaker is input from the registration voice input part 92. The voice input from the registration voice input part 92 is converted into a feature parameter in the registration voice analyzing part 93 and is stored in the speaker
10 template storing part 33 in linkage with the individual ID information as the voice template of the registered speaker.

 Then, in order to match the input environment of the speaker to be registered to the voice database input environment of other registered speakers, background noise is input to the background noise input part 94.
15 Then, the noise addition part 95 adds the input background noise to the voice data of the other registered speakers in the voice database 96, which have been registered beforehand. Herein, "background noise" refers to a noise that is inevitably input when a voice is input. For actual input, only a noise that accompanies no voice before or after inputting a voice is
20 input. Then, the registration voice analyzing part 93 converts the voice data with the noise into feature parameters in the same manner as the input voice corresponding to the individual ID. Then, the speaker template storing part 33 stores the feature parameters as the voice templates of the other registered speakers at the same time when the
25 voice template of the registered speaker is stored.

 This embodiment prevents the voice input environment of other registered speakers from being significantly different from the voice input environment of the speaker to be registered. For example, even if the voice input environment of an unauthorized person is closer to the voice
30 input environment of the registered speaker than to the voice input environment of the other registered speakers, erroneous determination that the unauthorized person is the person specified by the ID can be

avoided.

In this case, the input environment is adjusted not necessarily only with respect to the voice data itself. The adjustment can be performed after the voice data are converted into a feature parameter of the voice. In addition, in the case where the voices of the other
5 registered speakers are represented by probability models such as Hidden Markov Model, the environment can be adjusted by adapting registered speaker HMMs.

As described above, this embodiment where the speaker is
10 verified based on the false acceptance error rate makes it possible to obtain the criterion for judging the speaker that is closer to the theoretical values of the statistical probability distribution and to maintain the false acceptance error rate closer to the theoretical values even if the voice input environment changes and a noise is mixed. Thus,
15 the verification accuracy of the speaker verification can be maintained high without being affected by the aging of the input voice.

Next, the flow of processes of a program that realizes the speaker verification apparatus of an embodiment of the present invention will be described. Figs. 10 and 11 show flowcharts of processes of a
20 program that realizes the speaker verification apparatus of an embodiment of the present invention.

First, Fig. 10 is a flowchart of processes for verifying a speaker in the speaker verification apparatus of an embodiment of the present invention. Referring to Fig. 10, a user inputs his/her individual ID and
25 voice and a false acceptance error rate (step S101). The false acceptance error rate generally is previously input by a system manager as a predetermined value.

Then, the registered speaker corresponding to the individual ID is selected from the other registered speakers based on the individual ID
30 (step S102). The data of the registered speaker corresponding to the individual ID are used to obtain the verification distance to the input voice, and the data of the other registered speakers are used to obtain the

probability distribution of the interspeaker distances.

Then, the feature parameter of the input voice is extracted (step S103), and the verification distance with respect to the registered speaker corresponding to the individual ID and the speaker distances with respect
5 to the other registered speakers are calculated (step S104). The calculated results of the speaker distances with respect to the other registered speakers are used to estimate the probability distribution of the speaker distances (step S105).

When the probability distribution of the speaker distances is
10 obtained, a region defined by the false acceptance error rate can be obtained in the probability distribution. Thus, it is determined whether or not the verification distance with respect to the registered speaker corresponding to the individual ID is included in the region (step S106). In the case where the verification distance with respect to the registered
15 speaker corresponding to the individual ID is included in the region, the input voice is determined to be the voice of the registered person specified by the individual ID (step S107). In the case where the verification distance with respect to the registered speaker corresponding to the individual ID is not included in the region, the input voice is determined
20 to be the voice of an unauthorized person (step S108).

Next, Fig. 11 is a flowchart of processes for registering a speaker in the speaker verification apparatus of an embodiment of the present invention. Referring to Fig. 11, a user inputs his/her individual ID and voice and background noise data (step S111).

25 Then, the voice data of the other registered speakers are obtained (step S112). The method of obtaining the voice data is not limited to a particular method, but it is preferable to prepare a database of the voice data regarding the other registered speakers beforehand.

Next, the input background noise is added to the obtained voice
30 data of the other registered speakers (step S113). Thus, it is possible to minimize the difference between the environment of the input speech and that of other registered speakers beforehand in the input voice

environment.

Then, feature parameters are extracted with respect to the input voice and the voice data of the other registered speakers to which the noise is added (step S114). The feature parameter of the input voice
5 corresponding to the individual ID is stored as the speaker voice template. At the same time, the feature parameters of the voices of the other registered speakers are stored as the voice templates, which are used to calculate the speaker distances with respect to the other registered speakers (step S115).

10 A recording medium in which programs for realizing the speaker verification apparatus of the embodiment of the present invention are recorded can be not only a transportable recording medium 122 such as a CD-ROM 122-1, or a floppy disk 122-2, but also a remote accessible storage apparatus 121 or an equipped storage medium such as a hard
15 disk and a RAM of a computer, as shown in Fig. 12. The program 124 is loaded into the main memory of a data processing apparatus 123, and executed.

A recording medium in which the speaker templates or the like that are generated by the speaker verification apparatus of the
20 embodiment of the present invention are recorded can be not only a transportable recording medium 122 such as a CD-ROM 122-1, or a floppy disk 122-2, but also a remote accessible storage apparatus 121 or an equipped storage medium such as a hard disk and a RAM of a computer, as shown in Fig. 12. For example, the recording medium can be read by
25 a computer when using the speaker verification apparatus of the present invention.

The invention may be embodied in other forms without departing from the spirit or essential characteristics thereof. The embodiments disclosed in this application are to be considered in all respects as
30 illustrative and not limiting. The scope of the invention is indicated by the appended claims rather than by the foregoing description, and all changes which come within the meaning and range of equivalency of the

WHAT IS CLAIMED IS:

1. A speaker verification apparatus comprising:

- an identity claim input part to which an identity claim is input;
- 5 a speaker selecting part for selecting voice information of a registered speaker corresponding to the identity claim input to the identity claim input part;
- a speaker storing part for storing voice information of speakers;
- a voice input part to which a voice is input;
- 10 a voice analyzing part for analyzing the voice input to the voice input part;
- a speaker distance calculating part for calculating a verification distance between a feature parameter of the input voice and that of the voice of the registered speaker and the speaker distances between a
- 15 feature parameter of the input voice and those of the voices of speakers other than the registered speaker that are stored in the speaker sorting part, based on the analysis results of the voice analyzing part and the voice information stored in the speaker storing part; and
- a speaker judging part for determining whether or not the input
- 20 voice matches the registered speaker corresponding to the input identity claim,
- the speaker verification apparatus further comprising:
 - a false acceptance error rate input part to which a false acceptance error rate is input as a threshold, the false acceptance error rate being
 - 25 predetermined by a system manager or a user or adjustable depending on performance; and
 - a distribution estimating part for obtaining a probability distribution of interspeaker distances based on the speaker distances calculated in the speaker distance calculating part;
- 30 wherein the speaker judging part determines that the input voice is the voice of the registered person specified by the identity claim, in the case where the verification distance calculated in the speaker distance

calculating part is included in a region defined by the input false acceptance error rate in the probability distribution of the interspeaker distances.

- 5 2. The speaker verification apparatus according to claim 1,
 wherein it is assumed that the probability distribution of the
speaker distances is a normal distribution function, and
 the speaker judging part determines that the input voice is the
voice of the registered person specified by the identity claim, in the case
10 where the verification distance calculated in the speaker distance
calculating part is included in a region defined by the input false
acceptance error rate in the probability distribution of the speaker
distances obtained from the normal distribution function.

- 15 3. The speaker verification apparatus according to claim 1,
 wherein the probability distribution of the speaker distances is
obtained for each gender.

4. The speaker verification apparatus according to claim 1,
20 wherein the probability distribution of the speaker distances is
obtained as a weighting addition of a plurality of normal distributions.

5. A method for verifying a speaker comprising:
 inputting an identity claim;
25 selecting voice information of a registered speaker corresponding
to the input identity claim;
 inputting a voice of the speaker;
 analyzing the input voice;
 calculating a verification distance between a feature parameter of
30 the input voice and that of the voice of the registered speaker and the
speaker distances between a feature parameter of the input voice and
those of voices of speakers other than the registered speaker, based on the

analysis results and the voice; and

determining whether or not the input voice matches the registered speaker corresponding to the input identity claim,

the method further comprising:

5 inputting a false acceptance error rate as a threshold, the false acceptance error being predetermined by a system manager or a user or adjustable depending on performance; and

obtaining a probability distribution of the interspeaker distances based on the calculated speaker distances;

10 wherein it is determined that the input voice is the voice of the registered person specified by the identity claim, in the case where the calculated verification distance is included in a region defined by the input false acceptance error rate in the probability distribution of the interspeaker distances.

15

6. A computer-readable recording medium storing a program to be executed by a computer, the program comprising:

inputting an identity claim;

20 selecting voice information of a registered speaker corresponding to the input identity claim;

inputting a voice of the speaker;

analyzing the input voice;

25 calculating a verification distance between a feature parameter of the input voice and that of the voice of the registered speaker and the speaker distances between a feature parameter of the input voice and those of voices of speakers other than the registered speaker, based on the analysis results and the voice; and

determining whether or not the input voice matches the registered speaker corresponding to the input identity claim,

30 the program further comprising:

inputting a false acceptance error rate as a threshold, the false acceptance error rate being predetermined by a system manager or a user

or adjustable depending on performance; and

obtaining a probability distribution of the interspeaker distances based on the calculated speaker distances;

- 5 wherein it is determined that the input voice is the voice of the registered person specified by the identity claim, in the case where the calculated verification distance is included in a region defined by the input false acceptance error rate in the probability distribution of the interspeaker distances.

ABSTRACT OF THE DISCLOSURE

The present invention provides a speaker verification apparatus and method including inputting an identity claim, selecting voice
5 information of a registered speaker corresponding to the input identity claim, inputting a voice of the speaker, analyzing the input voice so as to extract a feature parameter, calculating a verification distance between a feature parameter of the input voice and that of the voice of the registered
10 speaker and the speaker distances between a feature parameter of the input voice and those of the voices of speakers other than the registered speaker; and determining whether or not the input voice matches the registered speaker corresponding to the input identity claim. A false acceptance error rate is input as a threshold, and the false acceptance error rate can be predetermined by a system manager or a user or can be
15 adjusted depending on the performance. A probability distribution of interspeaker distances is obtained based on the calculated speaker distances between feature parameters of the voices of other registered speakers and that of the input voice. It is determined that the input voice is the voice of the registered person specified by the identity claim,
20 in the case where the verification distance between a feature parameter of the voice of the registered speaker and that of the input voice is included in a rejection region of the input false acceptance error rate in the probability distribution of the interspeaker distances.

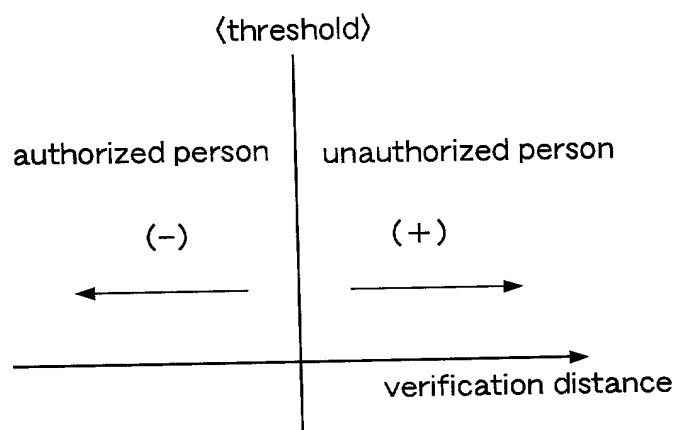


FIG. 1

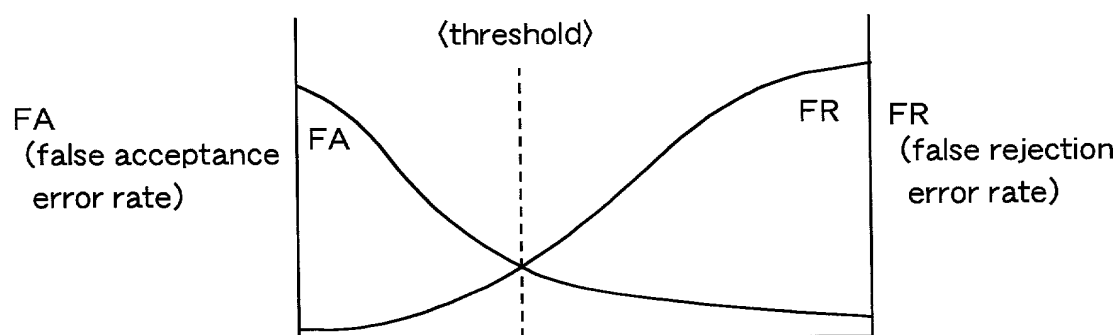


FIG. 2

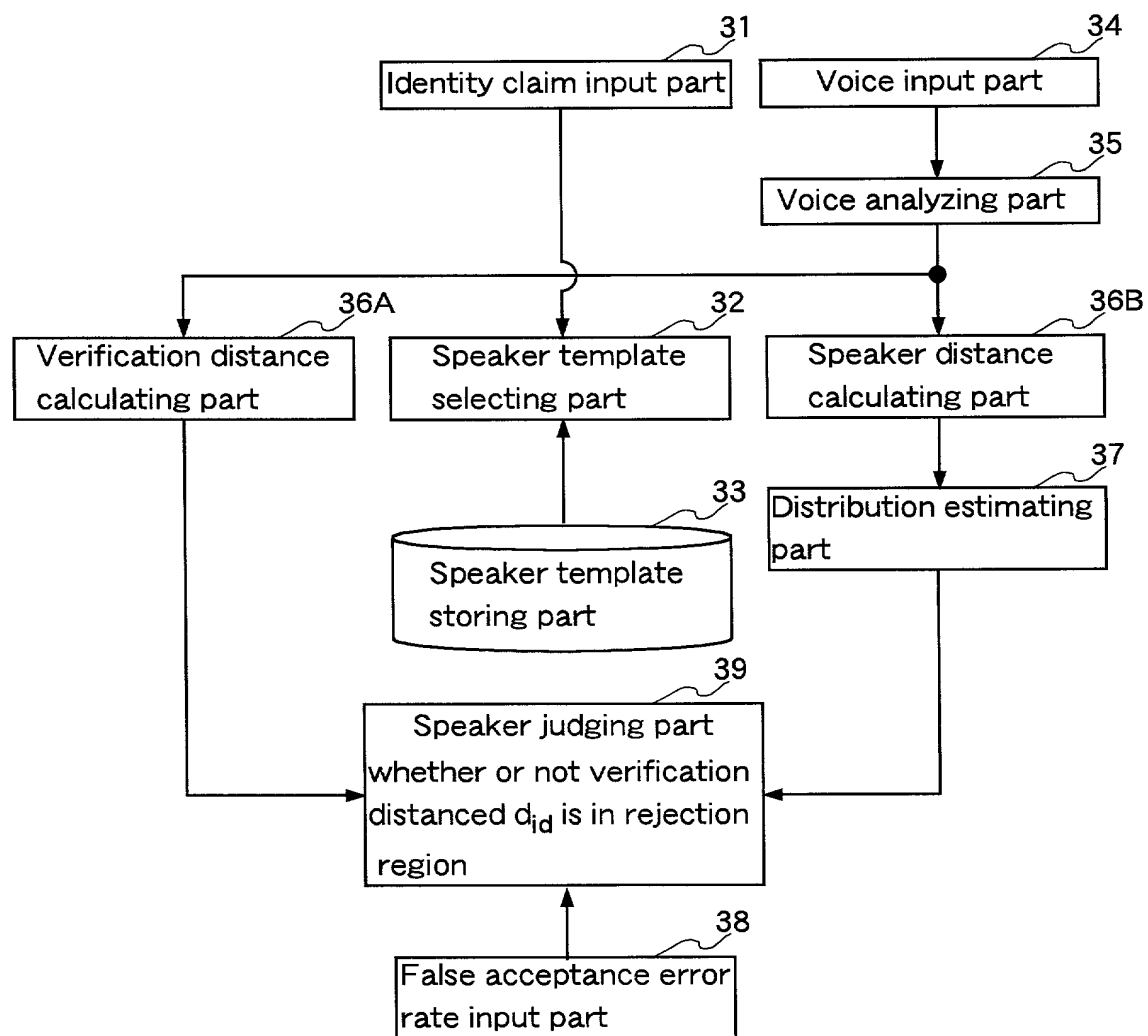


FIG. 3

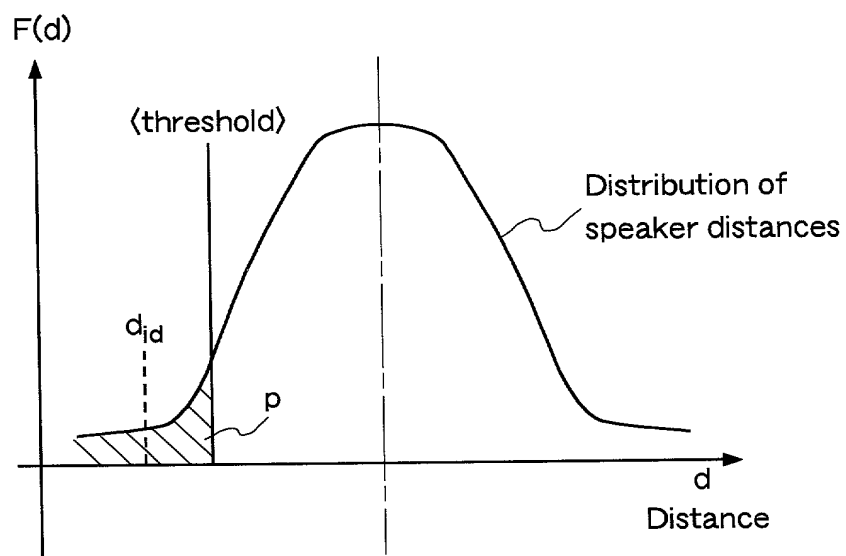


FIG. 4

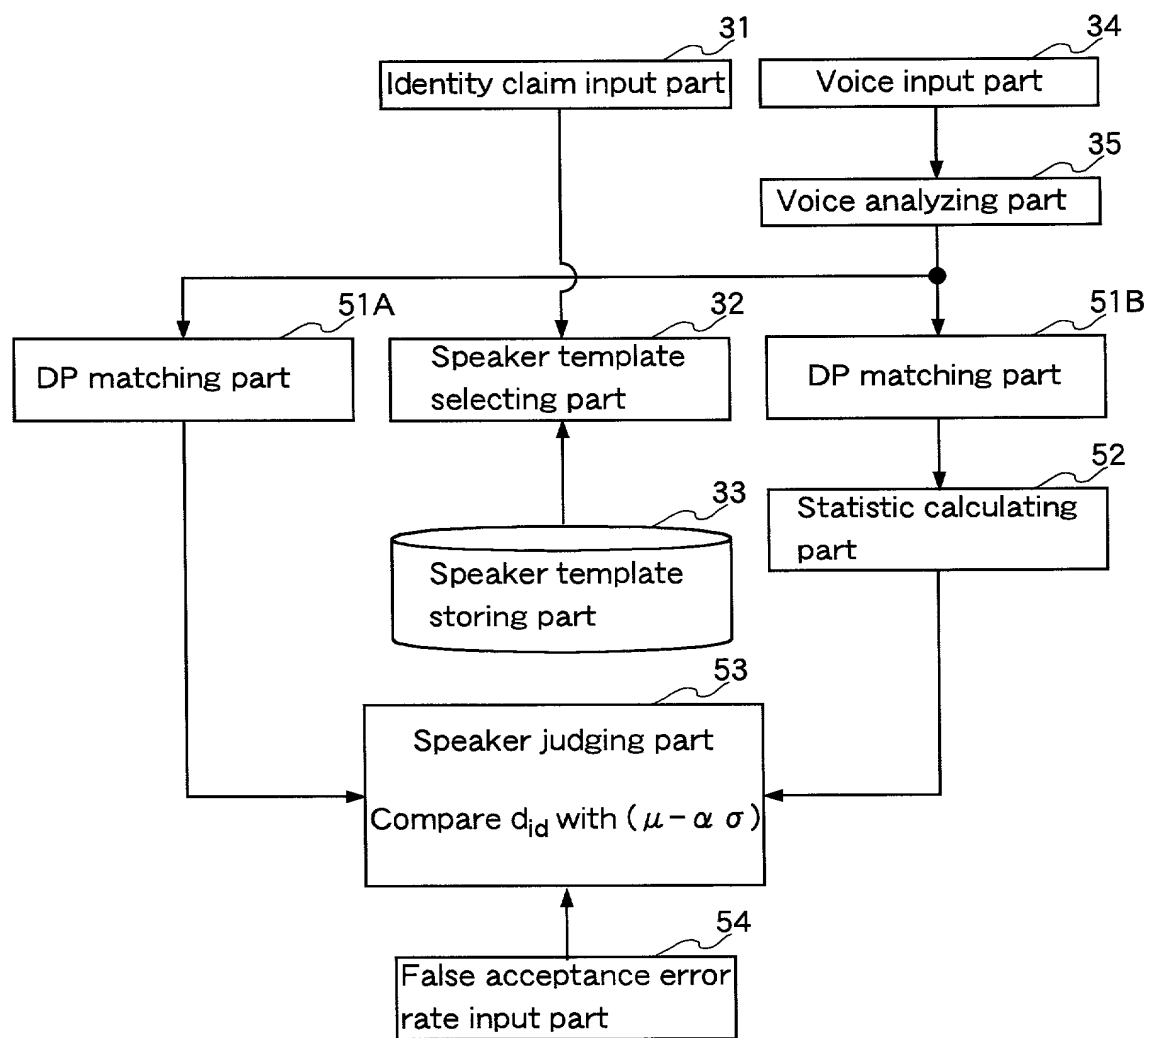


FIG. 5

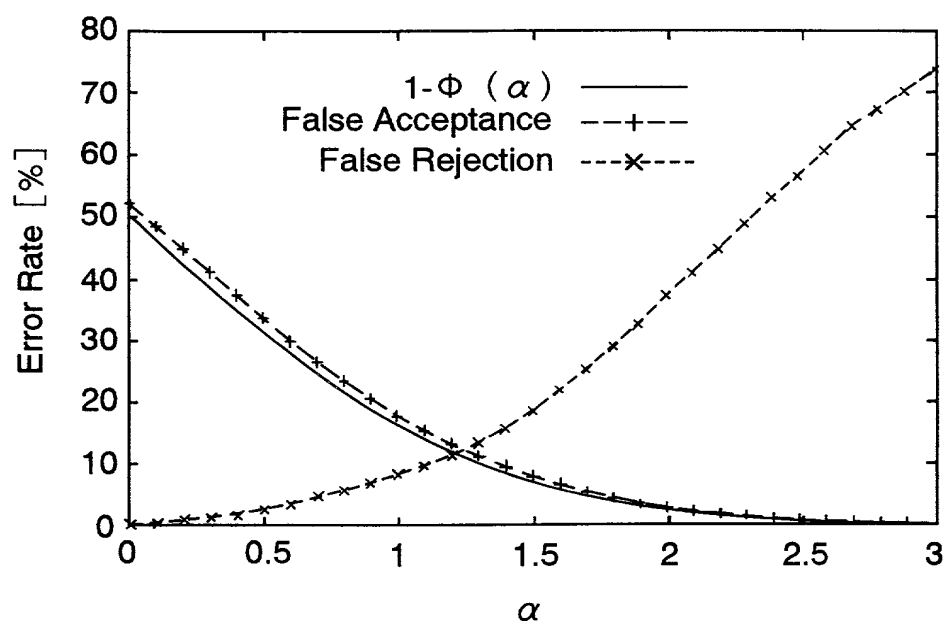


FIG. 6

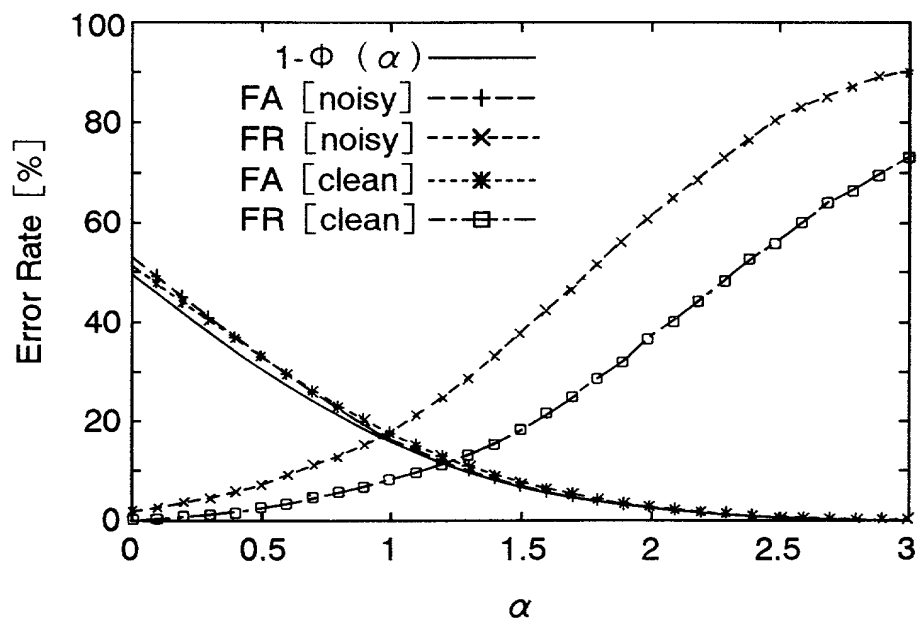


FIG. 7

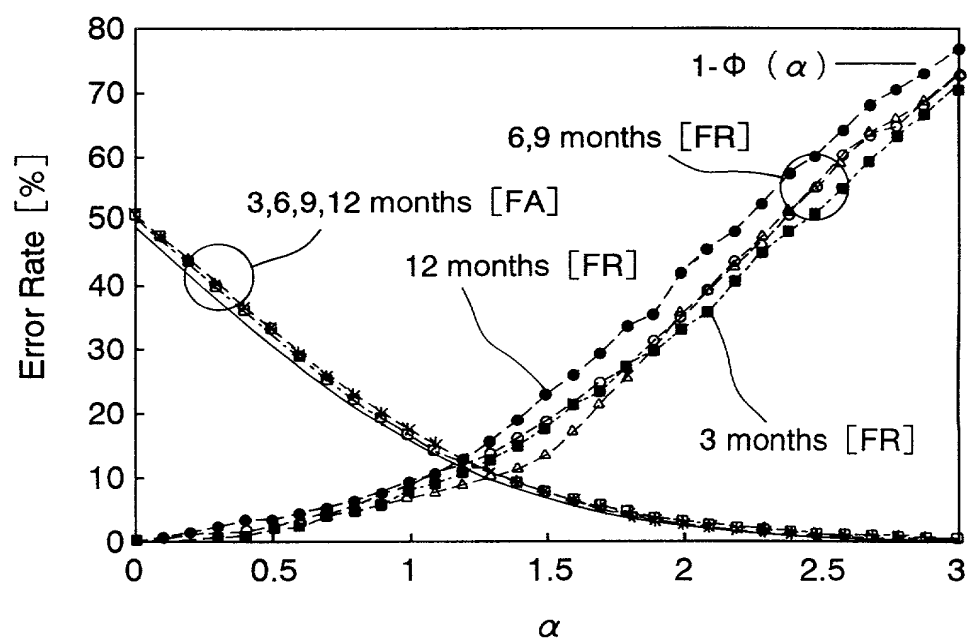


FIG. 8

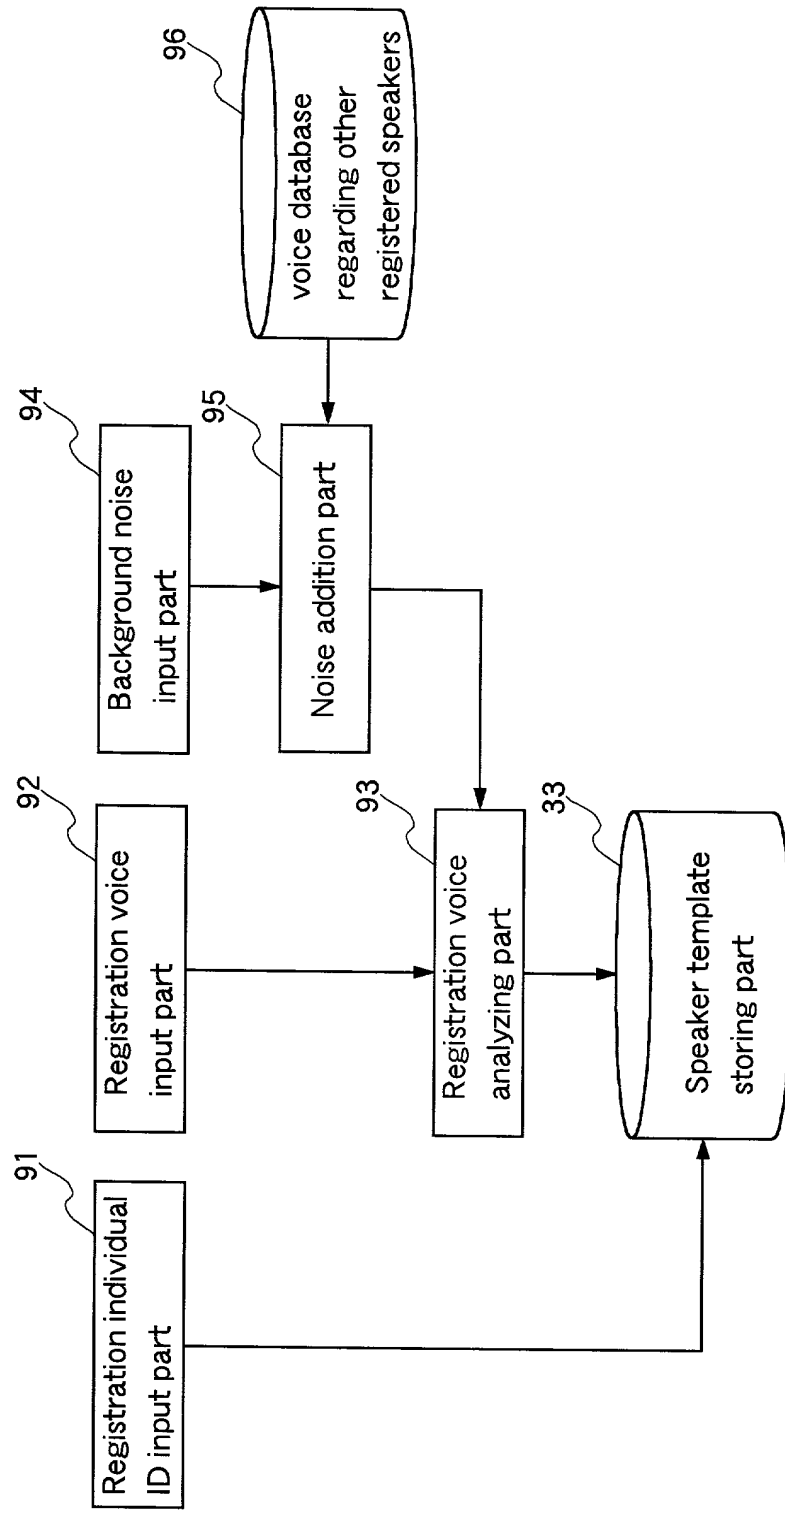


FIG. 9

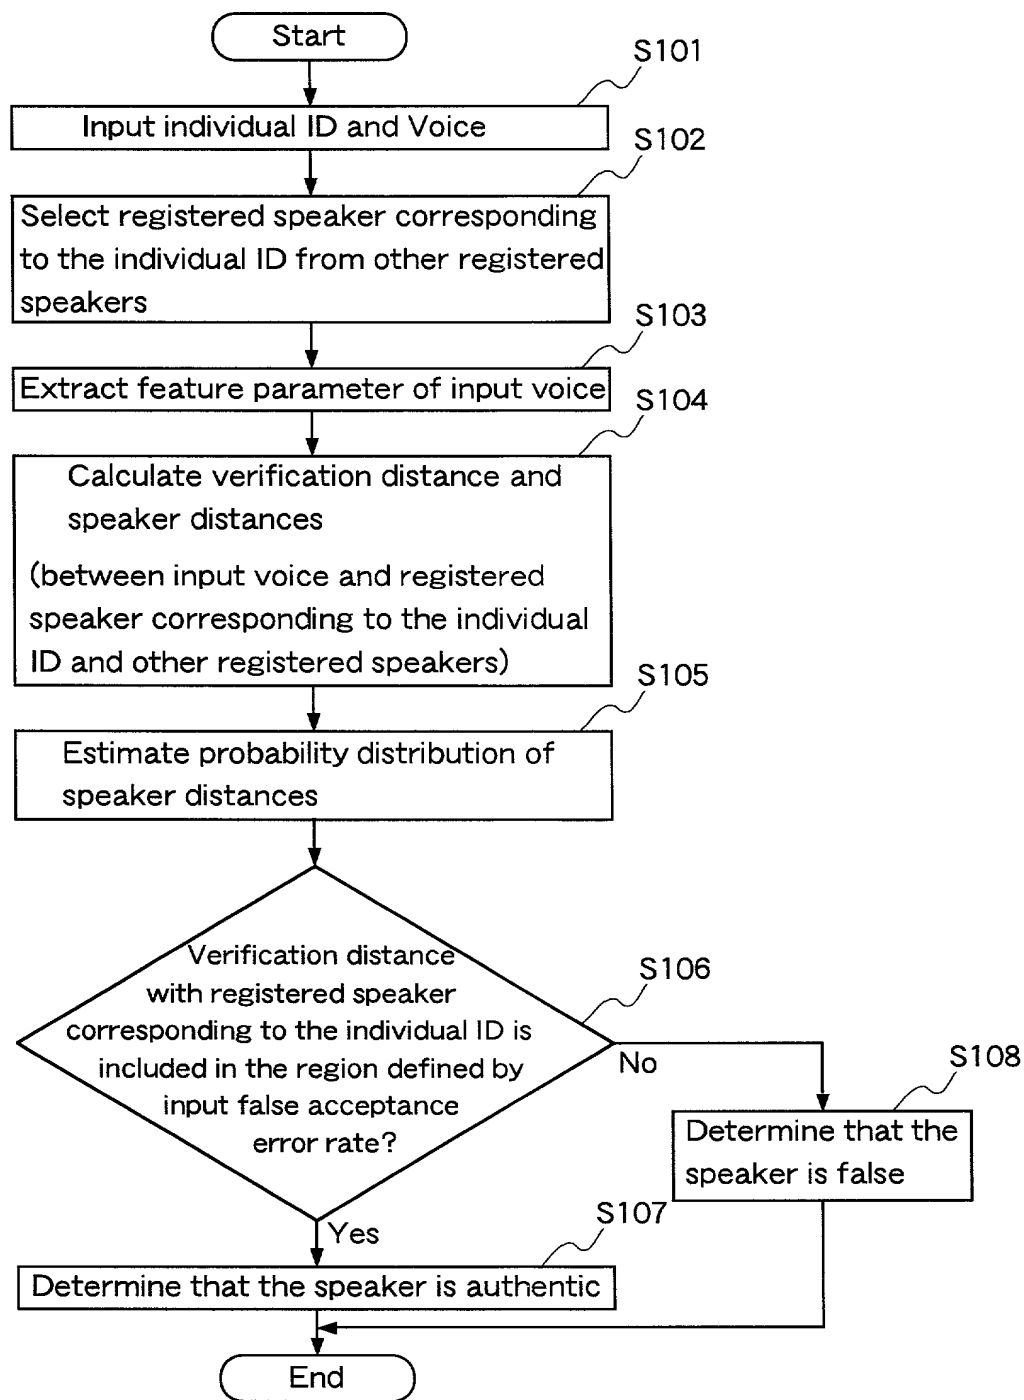


FIG. 10

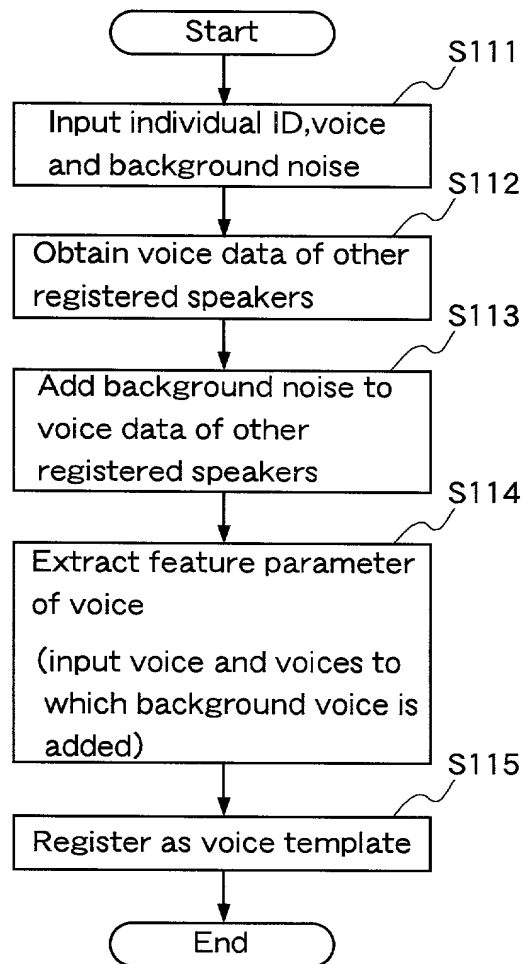


FIG. 11

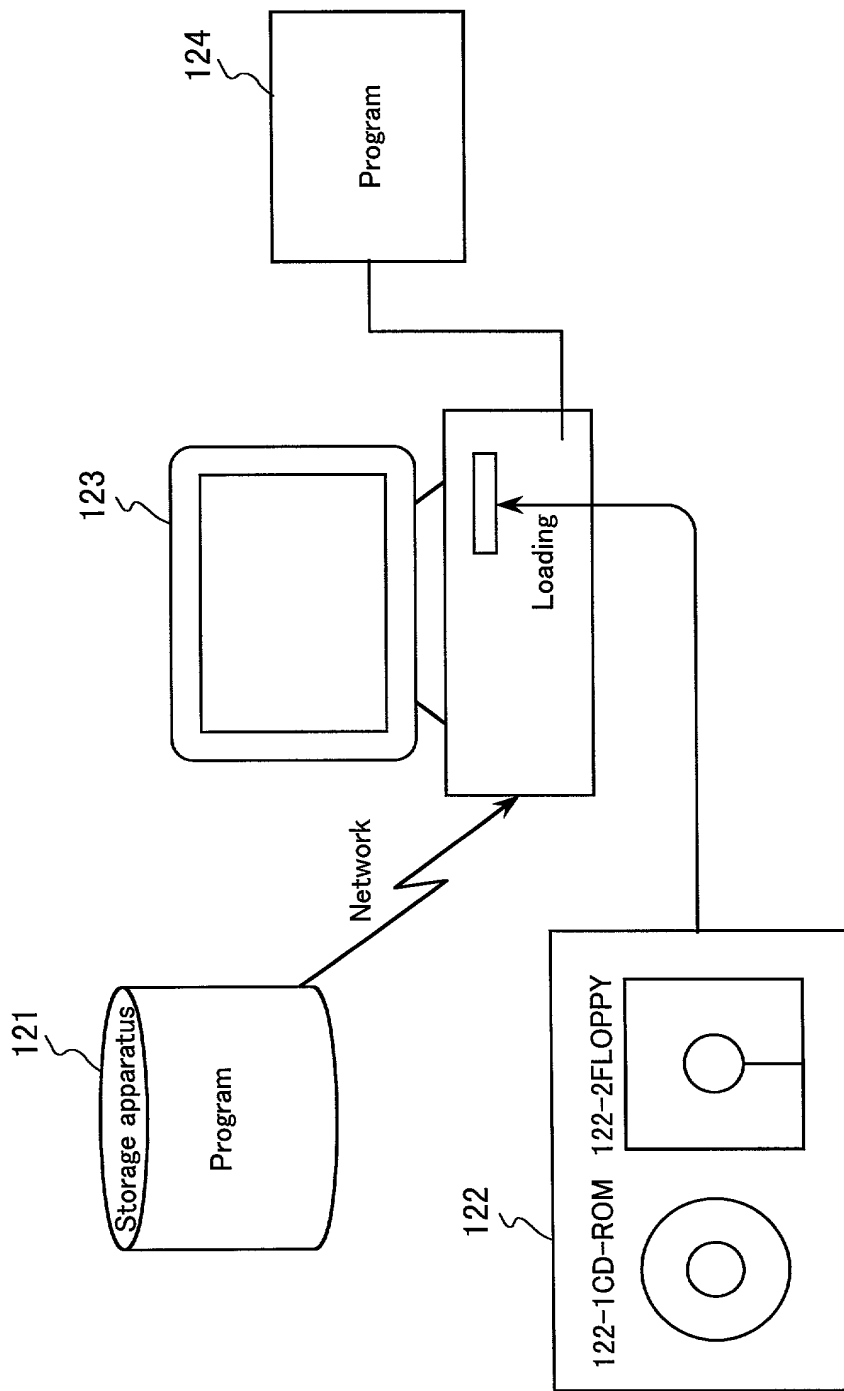


FIG . 12

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SPEAKER VERIFICATION APPARATUS AND

METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約
国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-94734	Japan
(Number)	(Country)
(番号)	(国名)
<hr/>	
(Number)	(Country)
(番号)	(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)	(Filing Date)
(出願番号)	(出願日)
<hr/>	
(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

1 / 4 / 1999	<input type="checkbox"/>
(Day/Month/Year Filed)	
(出願年月日)	
<hr/>	
(Day/Month/Year Filed)	<input type="checkbox"/>
(出願年月日)	

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)	
(現況: 特許許可済、係属中、放棄済)	
<hr/>	
(Status: Patented, Pending, Abandoned)	
(現況: 特許許可済、係属中、放棄済)	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続を米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,
30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.
Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756;
George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M.
Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)


STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor
	Shoji HAYAKAWA
発明者の署名	Inventor's signature
日付	Date
	Shoji Hayakawa January 13, 2000
住所	Residence
	Kanagawa, Japan
国籍	Citizenship
	Japanese
私書箱	Post Office Address
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome
	Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588
	Japan
第二共同発明者	Full name of second joint inventor, if any
	Fumitada ITAKURA
第二共同発明者	Second inventor's signature
日付	Date
	Fumitada Itakura January 13, 2000
住所	Residence
	Aichi, Japan
国籍	Citizenship
	Japanese
私書箱	Post Office Address
	3-506, Takabaridai, Meitou-ku, Nagoya-shi,
	Aichi 465-0054 Japan

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)

Japanese Language Declaration

	Full name of third joint inventor, if any Kazuya TAKEDA
日付	<div style="display: flex; justify-content: space-between;"> <div>Third Inventor's signature </div> <div>Date January 13, 2000</div> </div>
住所	Residence Aichi, Japan
国籍	Citizenship Japanese
郵便の宛先	Post Office Address 2-816, Hachimae, Meitou-ku, Nagoya-shi, Aichi 465-0018 Japan

	Full name of fourth joint inventor, if any
日付	<div style="display: flex; justify-content: space-between;"> <div>Fourth Inventor's signature</div> <div>Date</div> </div>
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

	Full name of fifth joint inventor, if any
日付	<div style="display: flex; justify-content: space-between;"> <div>Fifth Inventor's signature</div> <div>Date</div> </div>
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

	Full name of sixth joint inventor, if any
日付	<div style="display: flex; justify-content: space-between;"> <div>Sixth inventor's signature</div> <div>Date</div> </div>
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)